




Machine pictured with optional modular
turnstile uprights and transfer bars



5" Seamless Rollformer

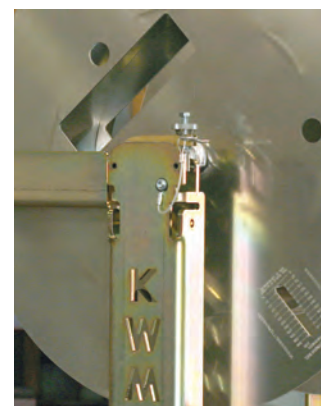

Innovative upright design reduces
friction at upright wear point.

Standard Equipment

- Front pull guillotine
- Seven station aluminum box
- Emergency shutdown switch
- Easy adjust entrance guides
- Two quick release runout stands

Standard Upright System

- 2 spool fixed upright & 1 aluminum spool
- New aluminum spools less than half the weight of steel spools
- Fixed upright system distributes the weight of the coils to the floor of the vehicle, not the machine

ROCK SOLID GUARANTEE: 3-YEARS Parts & Labor/Mechanical ▪ 1-YEAR Parts & Labor/Electrical

www.kwmgutterman.com

795 South Larkin Avenue, Rockdale, Illinois 60436 ▪ **E-mail** sales@kwmgutterman.com

Phone (815) 725-9205 ▪ **Fax** (815) 725-4429 ▪ **Toll-free** (888) 729-4290





PANTHER[®]
5" Seamless Rollformer
SPECIFICATIONS

<p>Power 3/4 HP, high torque sealed motor. 20-1 gear reduction unit. Machine plugs directly into 110-120V outlet.</p>	<p>Dimensions Top of spools to the bottom of machine 46". Width 23". Length 96" with straight blade guillotine. 99" with front pull guillotine.</p>								
<p>Construction 3/8" steel frame welded on a jig fixture for accuracy. Fully enclosed with 7 gauge steel sides. All parts individually plated or painted prior to assembly.</p>	<p>Drive/Forming Rollers Twelve drive forming rollers — 5 bottom, 7 top. Rollers are 1045 high carbon steel with .002 industrial hard chrome.</p>								
<p>Weight 1,200 lbs.</p>	<p>Production Approximately 35 feet per minute</p>								
<p>Recommended Materials Maximum width 11 3/4" to 12 3/8"</p> <table border="0"> <thead> <tr> <th>Material</th> <th>Maximum Gauge</th> </tr> </thead> <tbody> <tr> <td>Aluminum</td> <td>.032</td> </tr> <tr> <td>Painted steel</td> <td>26</td> </tr> <tr> <td>Copper</td> <td>16 oz. 3/4 hard</td> </tr> </tbody> </table>	Material	Maximum Gauge	Aluminum	.032	Painted steel	26	Copper	16 oz. 3/4 hard	<p>Options</p> <ul style="list-style-type: none"> ▪ Straight blade guillotine ▪ Additional runout support stands ▪ 220 volt/50hz. ▪ Single, double or triple spool upright available ▪ turnstile machine mount cradle ▪ CE Certification ▪ 12 volt DC power ▪ Trailer riser pad ▪ Modular turnstile uprights with coil tension brake ▪ Transfer bars
Material	Maximum Gauge								
Aluminum	.032								
Painted steel	26								
Copper	16 oz. 3/4 hard								

www.kwmgutterman.com

795 South Larkin Avenue ▪ Rockdale, Illinois 60436 ▪ E-mail sales@kwmgutterman.com

Phone (815) 725-9205 ▪ Fax (815) 725-4429 ▪ Toll-free (888) 729-4290

